UNIKC Semiconductor

P1203BV

N-Channel Enhancement Mode MOSFET

PRODUCT SUMMARY

$V_{(BR)DSS}$	$R_{DS(ON)}$	I_D
30V	12mΩ @V_{GS} = 10V	11A



SOP- 08



ABSOLUTE MAXIMUM RATINGS (T_A = 25 °C Unless Otherwise Noted)

PARAMETERS/TEST CONDITIONS		SYMBOL	LIMITS	UNITS
Drain-Source Voltage		V_{DS}	30	V
Gate-Source Voltage		V_{GS}	±20	
Continuous Drain Current[2]	T_A = 25 °C	I_D	11	A
	T_A = 100 °C		7	
Pulsed Drain Current[1, 2]		I_{DM}	40	
Avalanche Current		I_{AS}	28	
Avalanche Energy	L = 0.1mH	E_{AS}	40	mJ
Power Dissipation	T_A = 25 °C	P_D	2.5	W
	T_A = 100 °C		1	
Operating Junction & Storage Temperature Range		T_J, T_{STG}	-55 to 150	°C

THERMAL RESISTANCE RATINGS

THERMAL RESISTANCE	SYMBOL	TYPICAL	MAXIMUM	UNITS
Junction-to-Case	$R_{\theta JC}$		25	°C / W
Junction-to-Ambient	$R_{\theta JA}$		50	

[1]Pulse width limited by maximum junction temperature.

[2]Limited only by maximum temperature allowed

UNIKC Semiconductor

RoHS Compliant

P1203BV

N-Channel Enhancement Mode MOSFET

ELECTRICAL CHARACTERISTICS (T_J = 25 °C, Unless Otherwise Noted)

PARAMETER	SYMBOL	TEST CONDITIONS	LIMITS			UNIT
			MIN	TYP	MAX	
STATIC						
Drain-Source Breakdown Voltage	$V_{(BR)DSS}$	V_{GS} = 0V, I_D = 250μA	30			V
Gate Threshold Voltage	$V_{GS(th)}$	V_{DS} = V_{GS}, I_D = 250μA	1	1.8	3	
Gate-Body Leakage	I_{GSS}	V_{DS} = 0V, V_{GS} = ±20V			±100	nA
Zero Gate Voltage Drain Current	I_{DSS}	V_{DS} = 24V, V_{GS} = 0V			1	μA
		V_{DS} = 20V, V_{GS} = 0V , T_J = 125 °C			10	
On-State Drain Current[1]	$I_{D(ON)}$	V_{DS} = 10V, V_{GS} = 10V	70			A
Drain-Source On-State Resistance[1]	$R_{DS(ON)}$	V_{GS} = 4.5V, I_D = 11A		14	17.5	mΩ
		V_{GS} = 10V, I_D = 11A		8.5	12	
Forward Transconductance[1]	g_{fs}	V_{DS} = 5V, I_D = 10A		40		S
DYNAMIC						
Input Capacitance	C_{iss}	V_{GS} = 0V, V_{DS} = 20V, f = 1MHz		846		pF
Output Capacitance	C_{oss}			225		
Reverse Transfer Capacitance	C_{rss}			126		
Gate Resistance	R_g	V_{GS} = 0V, V_{DS} = 0V, f = 1MHz		1.65		Ω
Total Gate Charge[2]	Q_g	V_{DS} = 0.5$V_{(BR)DSS}$, I_D = 8.8A, V_{GS} = 10V		17		nC
Gate-Source Charge[2]	Q_{gs}			2.7		
Gate-Drain Charge[2]	Q_{gd}			4		
Turn-On Delay Time[2]	$t_{d(on)}$	V_{DD} = 15V, I_D = 12.5A, V_{GS} = 10V, R_G=6Ω		9		nS
Rise Time[2]	t_r			40		
Turn-Off Delay Time[2]	$t_{d(off)}$			20		
Fall Time[2]	t_f			6		
SOURCE-DRAIN DIODE RATINGS AND CHARACTERISTICS (T_J = 25 °C)						
Continuous Current	I_S				1.9	A
Forward Voltage[1]	V_{SD}	I_F = 25A, V_{GS} = 0V			1.3	V
Reverse Recovery Time	t_{rr}	I_F = 11 A, dI_F/dt = 100A / μS		21		nS
Reverse Recovery Charge	Q_{rr}			10		nC

[1]Pulse test : Pulse Width ≤ 300 μsec, Duty Cycle ≤ 2%.

[2]Independent of operating temperature.

UNIKC Semiconductor

RoHS Compliant

P1203BV

N-Channel Enhancement Mode MOSFET

Output Characteristics

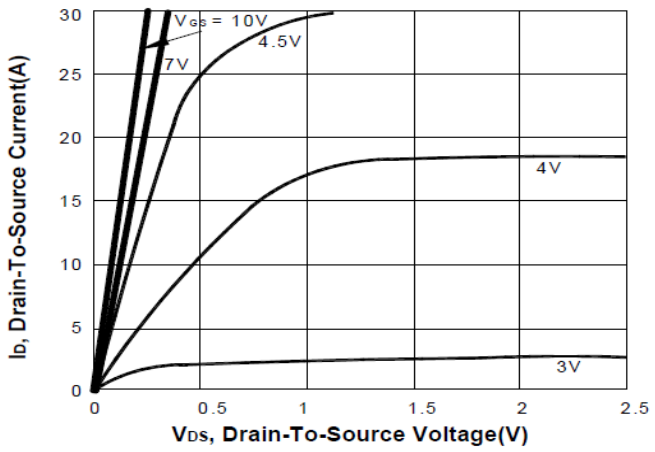

Transfer Characteristics

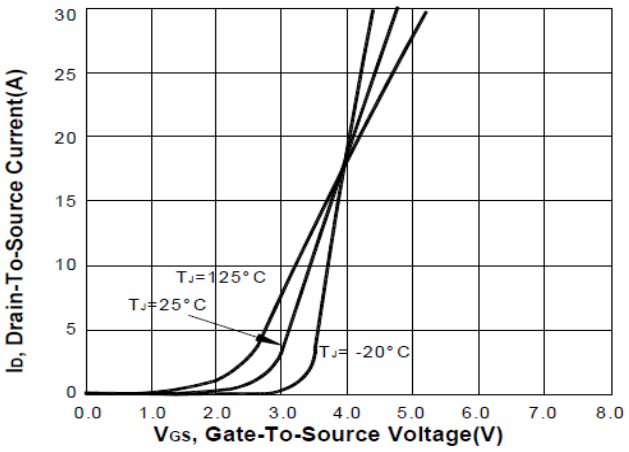

On-Resistance VS Temperature

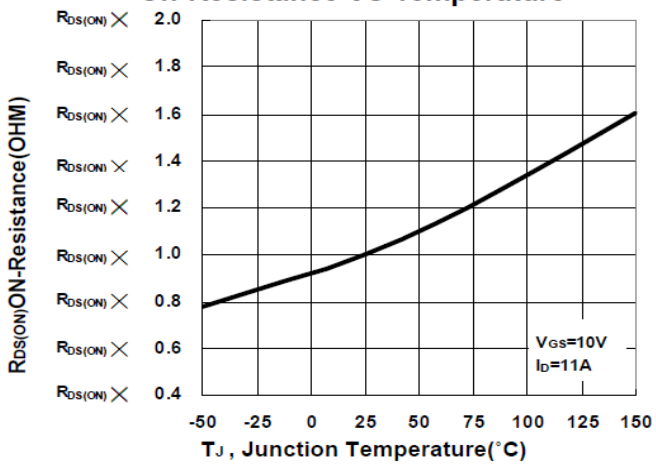

Capacitance Characteristic

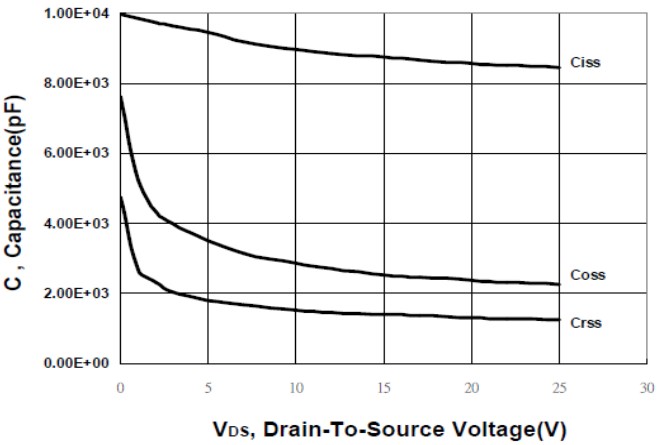

Gate charge Characteristics

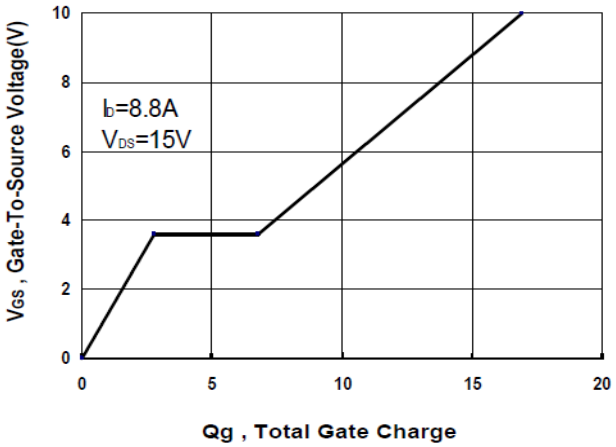

Source-Drain Diode Forward Voltage

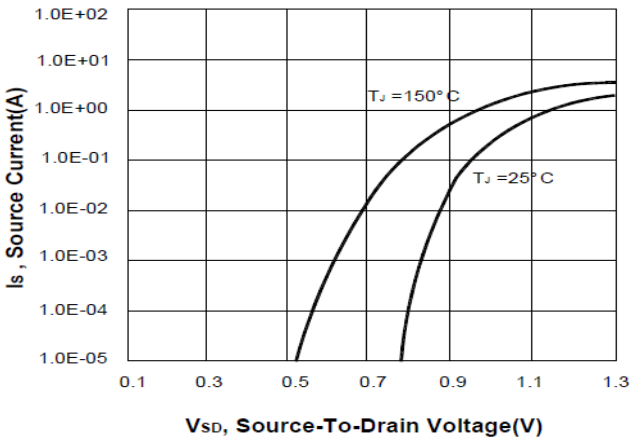

UNIKC Semiconductor

RoHS Compliant

P1203BV

N-Channel Enhancement Mode MOSFET

Safe Operating Area

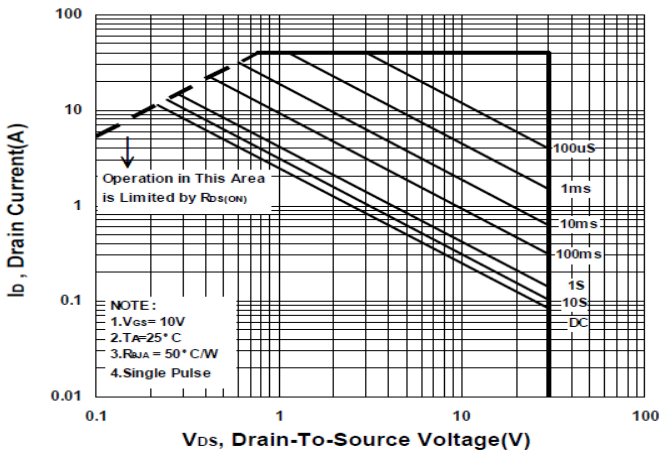

Single Pulse Maximum Power Dissipation

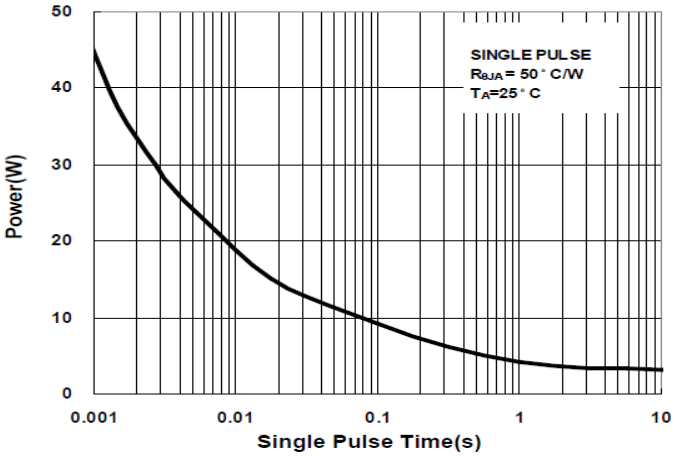

Transient Thermal Response Curve

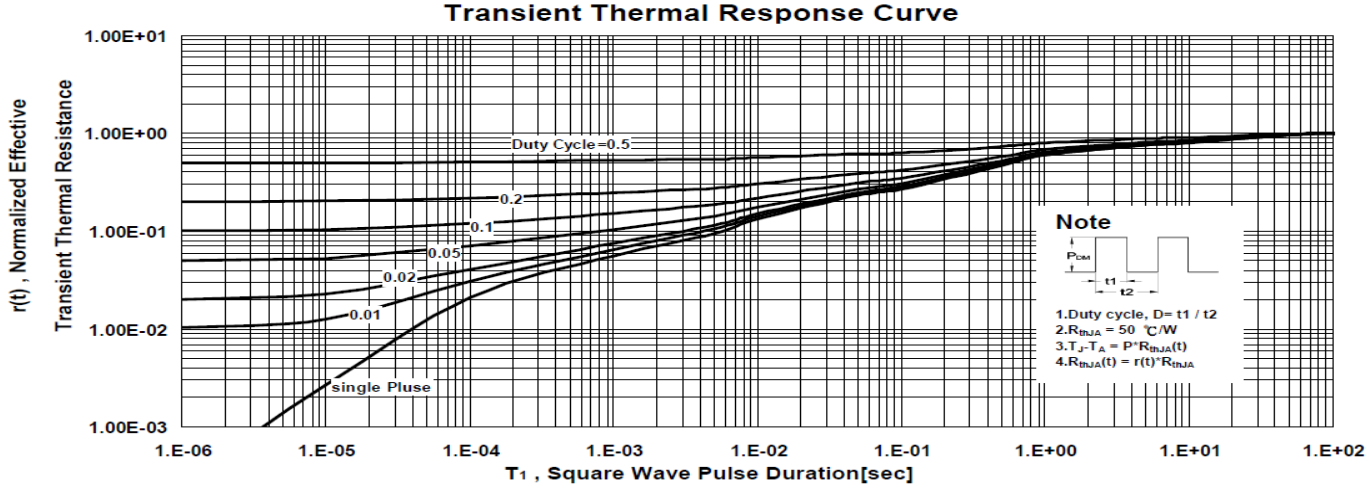

P1203BV

N-Channel Enhancement Mode MOSFET

Package Dimension

SOP-8 MECHANICAL DATA

Dimension	mm			Dimension	mm		
	Min.	Typ.	Max.		Min.	Typ.	Max.
A	4.8	4.9	5.0	H	0.4	0.6	0.93
B	3.8	3.9	4.0	I	0.19	0.21	0.25
C	5.79	6.0	6.2	J	0.25	0.375	0.5
D	0.33	0.4	0.51	K	0°	3°	18°
E	1.25	1.27	1.29				
F	1.1	1.3	1.65				
G	0.05	0.15	0.25				

